

**(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)**

**(19) World Intellectual Property  
Organization  
International Bureau**



**(43) International Publication Date**  
**3 March 2005 (03.03.2005)**

**PCT**

**(10) International Publication Number**  
**WO 2005/019646 A1**

**(51) International Patent Classification<sup>7</sup>: F04B 39/00**

**(21) International Application Number:**  
PCT/JP2004/008820

**(22) International Filing Date:** 17 June 2004 (17.06.2004)

(25) Filing Language: English

(26) **Publication Language:** English

**(30) Priority Data:**  
2003-300872      26 August 2003 (26.08.2003)      JP

(71) Applicant (for all designated States except US): MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.  
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka,  
5718501 (JP).

**(72) Inventor; and**

(75) **Inventor/Applicant (for US only):** KAKIUCHI, Takashi.

(74) **Agents:** IWAHASHI, Fumio et al.; c/o Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka, 5718501 (JP).

**(81) Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: HERMETIC COMPRESSOR

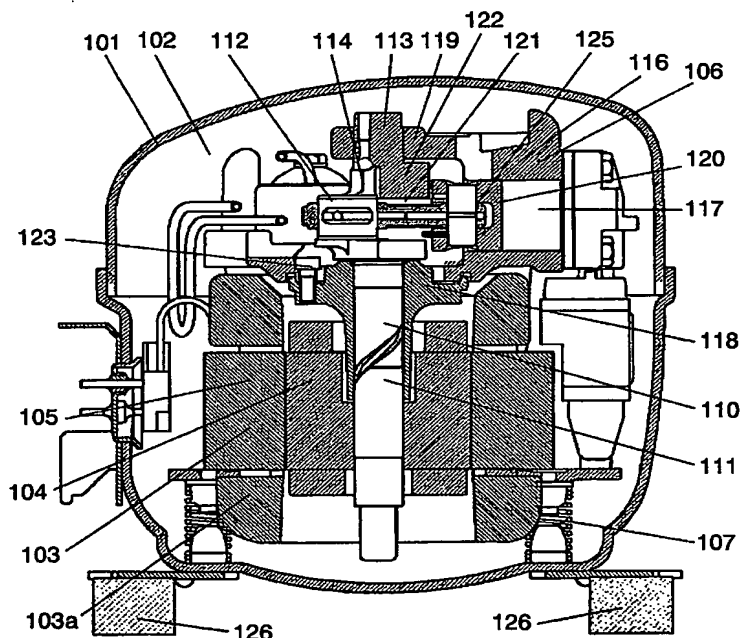

**(57) Abstract:** Outer circumferential shape of a balance weight is composed so that the distance between the outer circumference of the balance weight and the piston is substantially constant in the closely approaching interval of the balance weight and piston.

**WO 2005/019646 A1**

## DESCRIPTION

### HERMETIC COMPRESSOR

#### TECHNICAL FIELD

5 The present invention relates to a hermetic compressor used in refrigeration cycle, such as refrigerator, air conditioner and freezer.

#### BACKGROUND ART

10 Recently, hermetic compressors used in refrigerators and freezers for household use are strongly demanded to be smaller in size, lower in noise and lower in vibration. In this background, the refrigerant is being shifted to hydrocarbon refrigerant which is natural refrigerant of low global warming coefficient represented by R600a noted for zero ozone depletion coefficient. Besides, to keep balance with the piston which is a main source of vibration, the method of using a  
15 balance weight is effective technology for reducing vibrations.

Hitherto, as this kind of hermetic compressor using balance weight, it is attempted to adjust the imbalanced force of the compressor mechanism by equipping a crankshaft with a balance weight of a nearly arc profile.

Referring now to the drawings, a conventional hermetic compressor disclosed  
20 in Japanese Laid-open Patent 2000-213462 is described below.

Fig. 5 is a longitudinal sectional view of the conventional compressor. Fig. 6 is a plan sectional view of the conventional compressor.

In Fig. 5 and Fig. 6, closed container 1 is filled with refrigerant 2. Electric motor element 5 composed of stator 3 having winding 3a and rotor 4, and  
25 compression element 6 driven by electric motor element 5 are elastically

accommodated in container 1 by means of suspension spring 7. Shaft 10 has main shaft body 11 press-fitting rotor 4 and eccentric shaft body 12 formed eccentrically to main shaft body 11. Above eccentric shaft body 12, balance weight 22 of which outer circumference is a nearly arc profile centered on the axial center of main shaft body 11 is fixed. Cylinder block 16 has nearly cylindrical compression chamber 17. Piston 20 is inserted in compression chamber 17 so as to be freely slidable reciprocally. Piston 20 is coupled to eccentric shaft body 12 by means of connecting means 21.

In the hermetic compressor having such configuration, the operation is described below.

Rotor 4 of electric motor element 5 rotates piston 20. As rotary motion of eccentric shaft body 12 is transferred to piston 20 by way of connecting means 21, piston 20 moves reciprocally in compression chamber 17. As a result, refrigerant gas is sucked and compressed in compression chamber 17 from a cooling system (not shown), and discharged again into the cooling system.

At this time of compression action, as piston 20 makes reciprocal motions, reciprocal inertial force is generated as imbalanced force. This reciprocal inertial force is balanced by installing balance weight 22 so as to be in reverse phase to piston 20. In this configuration, the reciprocal inertial force of piston 20 in horizontal direction is canceled to a certain extent.

In the conventional structure, to lower the overall height of the compressor, when balance weight 22 is disposed on a horizontal extension of piston 20, balance weight 22 and piston 20 come to closest distance at the bottom dead center of piston 20. To avoid such interference, balance weight 22 is designed in a nearly arc profile. Accordingly, balance weight 22 does not have sufficient inertial force. That is,

reciprocal inertial force of piston 20 cannot be canceled sufficiently, and vibration of the hermetic compressor is increased.

### DISCLOSURE OF THE INVENTION

5       The invention is devised in the light of the above problems of the prior art, and it is hence an object thereof to present a hermetic compressor of low vibration having a balance weight with a greater inertial force, in a configuration of disposing a balance weight on a horizontal extension of a piston.

10       The hermetic compressor of the invention comprises (i) an electric moter element, (ii) a compression element driven by the electric moter element, (iii) a closed container accommodating the electric moter element and compression element, and (iv) a refrigerant contained in the closed container. The compression element comprises (i) a shaft having an eccentric shaft body and a main shaft body, (ii) a cylinder block having a compression chamber, (iii) a piston moving  
15       reciprocally in the compression chamber, (iv) connecting means for connecting the piston and eccentric shaft body, and (v) a balance weight formed on the shaft. The piston is positioned on a horizontal extension of the balance weight. The outer circumference of the balance weight is formed in such a shape that the distance between the outer circumference of the balance weight and the piston is  
20       substantially constant along the closely approaching interval of the balance weight and piston.

### BRIEF DESCRIPTION OF THE DRAWINGS

25       Fig. 1 is a longitudinal sectional view of hermetic compressor in preferred embodiment of the invention.

Fig. 2 is a plan sectional view of hermetic compressor in the same preferred embodiment.

Fig. 3 is an essential magnified view of hermetic compressor in the same preferred embodiment.

5 Fig. 4 is an essential model diagram of hermetic compressor in the same preferred embodiment.

Fig. 5 is a longitudinal sectional view of a conventional compressor.

Fig. 6 is a plan sectional view of the conventional compressor.

## 10 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A preferred embodiment of the invention is described specifically below while referring to the accompanying drawings.

Fig. 1 is a longitudinal sectional view of hermetic compressor in preferred embodiment of the invention. Fig. 2 is a plan sectional view of the same preferred  
15 embodiment. Fig. 3 is an essential magnified view of the same preferred embodiment. Fig. 4 is an essential model diagram of the same preferred embodiment.

In Fig. 1 to Fig. 4, closed container 101 is filled with refrigerant 102 composed of isobutane (R600a). Electric moter element 105 composed of stator 103 and rotor  
20 104, and compression element 106 driven by electric moter element 105 are elastically accommodated in closed container 101 by means of suspension spring 107. Electric moter element 105 is driven by inverter at plural operating frequencies including an operating frequency of less than the power source frequency. Herein, a frequency of 30 Hz or less is included in the operating frequency. Closed container  
25 101 is supported by grommet 126.

Shaft 110 has (i) main shaft body 111 press-fitting rotor 104, (ii) eccentric shaft body 112 formed eccentrically to main shaft body 111, (iii) subsidiary shaft body 113 provided coaxially with main shaft body 111, (iv) joint 114 for connecting between eccentric shaft body 112 and subsidiary shaft body 113, and (v) balance weight 122 made of same material as shaft 110 in the lower part of subsidiary shaft body 113. Piston 120 is positioned on a horizontal extension of balance weight 122.

Cylinder block 116 having compression chamber 117 of nearly cylindrical shape has subsidiary bearing 119 for supporting subsidiary shaft body 113 above it. Beneath cylinder block 116, main bearing 118 for supporting main shaft body 111 is fixed by means of screw 123. Piston 120 is slidably inserted in compression chamber 117 of cylinder block 116. Piston 120 is coupled with eccentric shaft body 112 by means of connecting means 121. Supposing axial center 111a of main shaft body 111 to be origin, coordinates (x, y) of outer circumference of balance weight 122 are expressed as (expression-1) and (expression-2).

$$x = [s \cdot \cos(360^\circ - \theta) + L \cdot \cos \{(\sin^{-1}(s \cdot \sin(360^\circ - \theta) / L)\} + C - \alpha] \cdot \cos(360^\circ - \theta) \quad (\text{expression-1})$$

$$y = [s \cdot \cos(360^\circ - \theta) + L \cdot \cos \{(\sin^{-1}(s \cdot \sin(360^\circ - \theta) / L)\} + C - \alpha] \cdot \sin(360^\circ - \theta) \quad (\text{expression-2})$$

where s: eccentric amount of shaft 110 (distance between axial center 111a of main shaft body 111 and axial center 112a of eccentric shaft body 112)

L : pitch length of connecting means 121

C: skirt length of piston 120

$\alpha$  : distance between outer circumference of balance weight 122 and piston 120

$\theta$  : rotation angle of eccentric shaft body 112

For example, supposing eccentric amount  $s$  of shaft 110 to be 10 mm, pitch length  $L$  of connecting means 121 to be 37.3 mm, skirt length  $C$  of piston 120 to be 9.9 mm, and distance  $\alpha$  between outer circumference of balance weight 122 and piston 120 to be 1.5 mm, the coordinates  $(x, y)$  of the outer circumference of balance weight 122 are determined specifically as (expression-3) and (expression-4).

$$x = [10.0 \times \cos (360^\circ - \theta) + 37.3 \times \cos \{(\sin^{-1} (10.0 \times \sin (360^\circ - \theta) / 37.3)\} + 9.9 - 1.5] \times \cos (360^\circ - \theta) \quad (\text{expression-3})$$

$$y = [10.0 \times \cos (360^\circ - \theta) + 37.3 \times \cos \{(\sin^{-1} (10.0 \times \sin (360^\circ - \theta) / 37.3)\} + 9.9 - 1.5] \times \sin (360^\circ - \theta) \quad (\text{expression-4})$$

In this configuration, in the closely approaching interval of balance weight 122 and piston 120, the distance between outer circumference of balance weight 122 and piston 120 may be always kept constant at 1.5 mm. That is, in the structure having balance weight 122 disposed on a horizontal extension of piston 120, in order to utilize effectively the space at the side of shaft 110 of piston 120, by setting distance  $\alpha$  at 2.0 mm or less, balance weight 122 having a large mass can be provided. Besides, by defining distance  $\alpha$  at 1.5 mm, a sufficient design quality is obtained if considering fluctuations of dimension precision of parts.

The magnitude of inertial force obtained by rotation of balance weight 122 is proportional to the product of the distance from axial center 112a of eccentric shaft body 112 to the center of gravity of balance weight 122 and the mass of balance weight 122. Therefore, according to the preferred embodiment, a greater inertial force can be applied as compared with balance weight 22 of nearly arc profile in the prior art. That is, the reciprocal inertial force of piston 120 can be canceled more effectively than in the prior art, and vibrations can be decreased without sacrificing the downsizing of compressor.

As the refrigerant, hitherto, tetrafluoroethane (R134a) has been generally used, but isobutane (R600a) is used in this preferred embodiment. The density of R600a is small, about 0.6 times that of R134a. Hence, in order to obtain the same refrigerating capacity as R134a, the required cylinder volume is about 1.7 times larger, and the mass of piston 120 is significantly increased. However, the embodiment incorporates balance weight 122 having a large inertial force in a limited space, and the reciprocal inertial force of piston 120 can be sufficiently canceled, and vibrations of the compressor can be decreased.

Besides, to realize high efficiency, the bearing is supported at two sides, and the overall height tends to be higher as compared with the bearing supported at one side. However, in the structure of disposing balance weight 122 on a horizontal extension of piston 120, balance weight 122 having a large inertial force in a limited space can be provided. As a result, the overall height is not so much increased. That is, without sacrificing the downsizing of the compressor, a compressor of high efficiency and low vibration can be presented.

When forming balance weight 122 separately from shaft 110, by employing a process capable of obtaining a dimensional precision close to the die precision such as sinter molding and iron plate presswork, a balance weight of a high dimensional precision can be obtained. As a result, distance  $\alpha$  between the outer circumference of balance weight 122 and piston 120 can be shortened. That is, since balance weight 122 having a large inertial force in a limited space can be provided, vibrations of the compressor can be further decreased.

In the case of the bearing supported at both sides, by fixing balance weight 122 formed separately beneath subsidiary shaft body 133 by using bolts or rivets, assembling is easier, and the manufacturing cost of compressor can be lowered.



In the preferred embodiment, cylinder block 116 and main bearing 118 supporting main shaft body 111 are fixed by screws 123, but main bearing 118 may be formed integrally in cylinder block 116. In this case, same effects are obtained.

The smaller end side of connecting means 121 connecting with piston 120 has  
5 an annular shape, but a spherical ball joint may be also used. In this case, same effects are obtained.

Nearly same effects as in the invention are obtained by forming notch or dent in part of the outer circumference of balance weight 122.

Electric moter element 105 is driven by inverter at plural operating frequencies  
10 including at least a frequency of 30 Hz or less that is an operating frequency of less than power source frequency, by a driving circuit (not shown). As a result, an appropriate refrigerating capacity can be obtained in a refrigerating machine for household use largely fluctuating in load such as refrigerator and freezer.

On the other hand, since electric moter element 105 and compression element  
15 106 are elastically supported by way of suspension spring 107, they have low eigenvalues. By inverter driving at operating frequency of lower than 30 Hz, vibrations of compression element 106 are close to the eigenvalues, and vibrations are increased by resonance. According to the preferred embodiment, since vibrations of compression element 106 can be decreased by applying a large inertial  
20 force by balance weight 122, operation at low operating frequency of lower than 30 Hz can be realized.

### INDUSTRIAL APPLICABILITY

As described herein, according to the invention, since the reciprocal inertial  
25 force of the piston can be canceled sufficiently by providing a balance weight

having a sufficient inertial force in a limited space, on a horizontal extension of the piston, vibrations of hermetic compressor can be decreased. It hence presents a hermetic compressor of low vibration type which can be connected to a refrigeration cycle of refrigerator, air conditioner or freezer.

5

10

15

20

25

**CLAIMS**

1. A hermetic compressor comprising:

an electric moter element;

a compression element driven by the electric moter element;

5 a closed container accommodating the electric moter element and compression element; and

a refrigerant contained in the closed container,

the compression element comprising:

a shaft having an eccentric shaft body and a main shaft body;

10 a cylinder block having a compression chamber;

a piston moving reciprocally in the compression chamber;

connecting means for connecting the piston and the eccentric shaft body;

and

a balance weight formed on the shaft,

15 wherein the piston is positioned on a horizontal extension of the balance weight; and

wherein the balance weight is formed in such a shape that the distance between the outer circumference of the balance weight and the piston is substantially constant in the closely approaching interval of the balance weight and piston.

20

2. The hermetic compressor of claim 1,

wherein supposing axial center of the main shaft body to be origin, x-coordinate and y-coordinate of outer circumference of the balance weight are substantially expressed as follows:

25

$$x = [s \cdot \cos (360^\circ - \theta) + L \cdot \cos \{(\sin^{-1} (s \cdot \sin (360^\circ - \theta) / L)\} + C - \alpha] \cdot \cos$$

$$(360^\circ - \theta)$$

$$y = [s \cdot \cos(360^\circ - \theta) + L \cdot \cos \{(\sin^{-1}(s \cdot \sin(360^\circ - \theta) / L)\} + C - \alpha] \cdot \sin(360^\circ - \theta)$$

where s: distance between axial center of main shaft body and axial center of  
5 eccentric shaft body,

L: pitch length of connecting means,

C: skirt length of piston,

$\alpha$ : distance between outer circumference of balance weight and piston,  
and

10  $\theta$ : rotation angle of eccentric shaft body.

3. The hermetic compressor of claim 1 or 2,

wherein the distance between outer circumference of the balance weight and  
the piston is 2 mm or less.

15

4. The hermetic compressor of claim 1 or 2,

wherein the balance weight is formed by either sinter alloy or press processing  
of iron plate.

20

5. The hermetic compressor of claim 1 or 2,

wherein the refrigerant is R600a.

6. The hermetic compressor of claim 1 or 2, further comprising:

a subsidiary shaft body formed coaxially with the main shaft body; and

25

a subsidiary bearing for supporting the subsidiary shaft body,

wherein the balance weight is provided at the end of the eccentric shaft body side of the subsidiary shaft body.

7. The hermetic compressor of claim 1 or 2,

5 wherein the electric moter element is driven by inverter at plural operating frequencies including at least an operating frequency of less than the power source frequency.

8. The hermetic compressor of claim 7,

10 wherein the operating frequency includes at least a frequency of less than 30 Hz.


15

20

25


1/6

FIG. 1

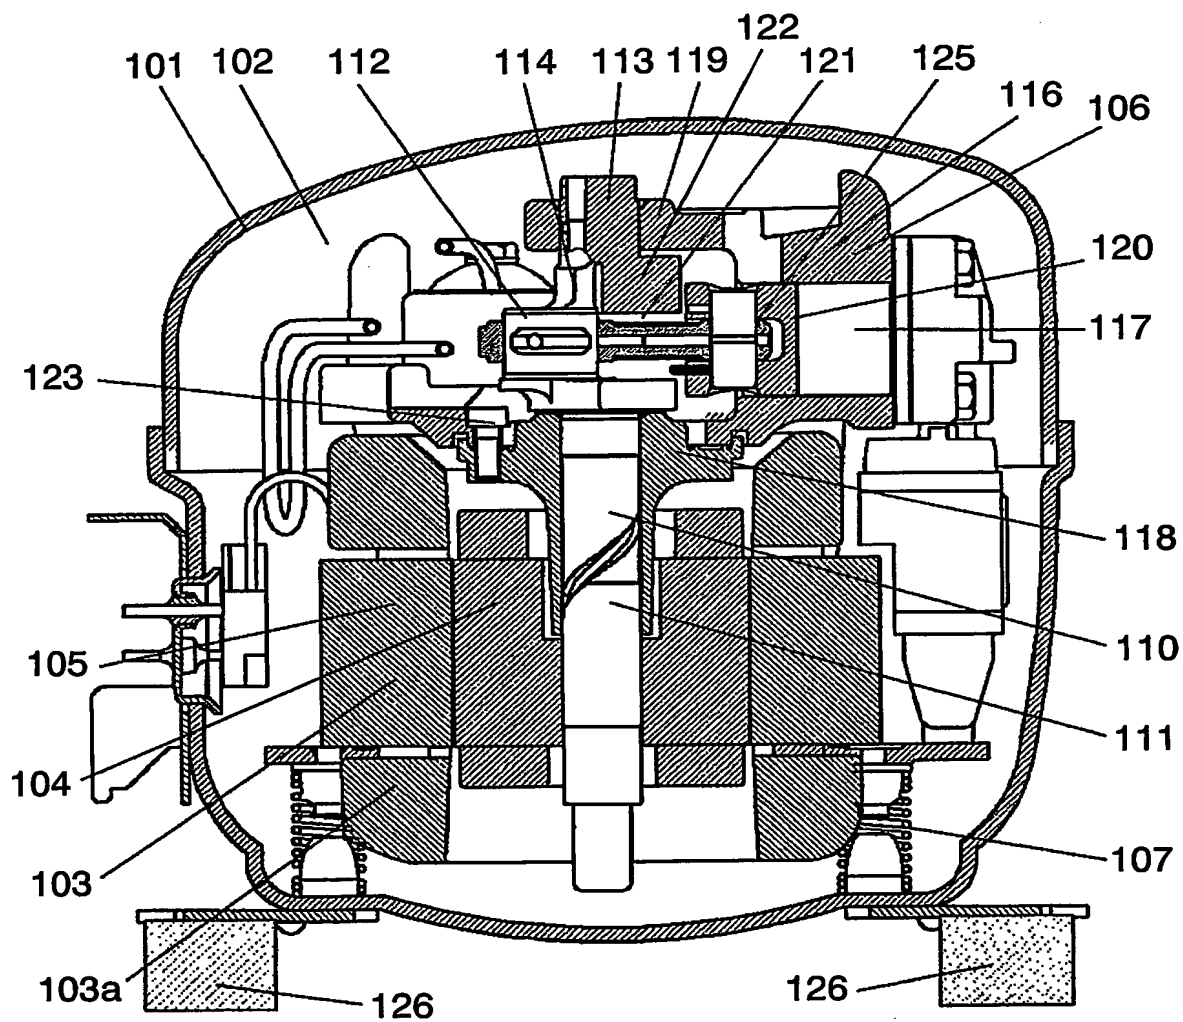

2/6

FIG. 2

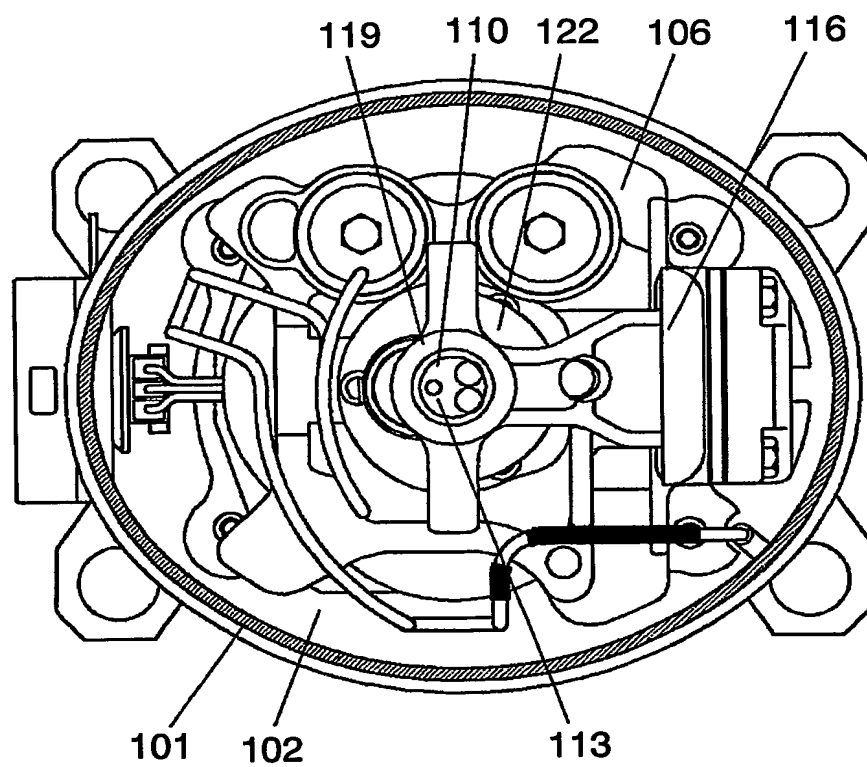

3/6

FIG. 3


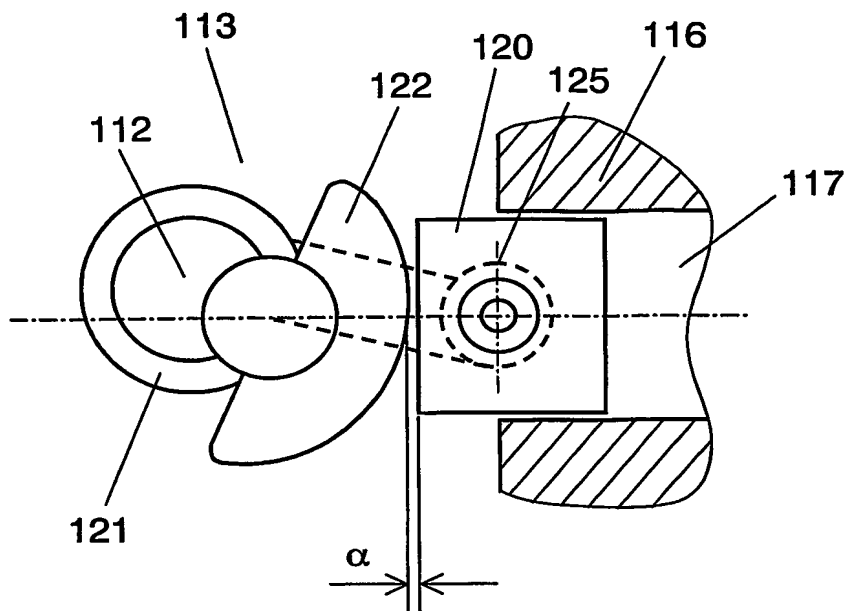



FIG. 4



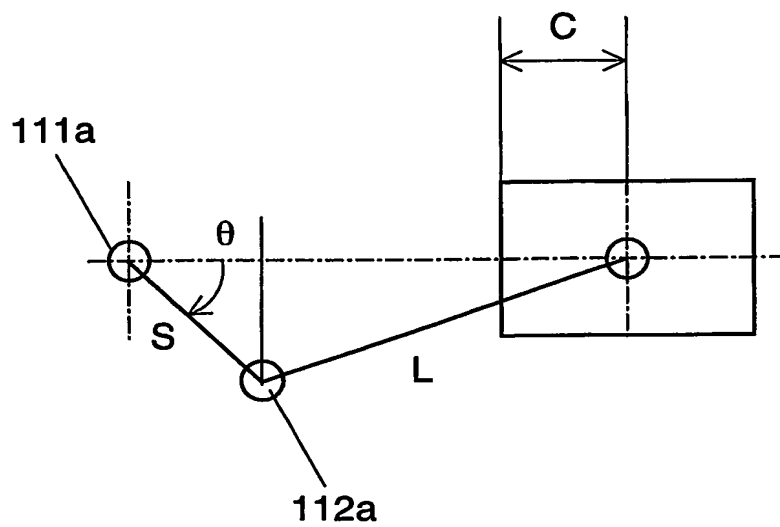


4/6

FIG. 5

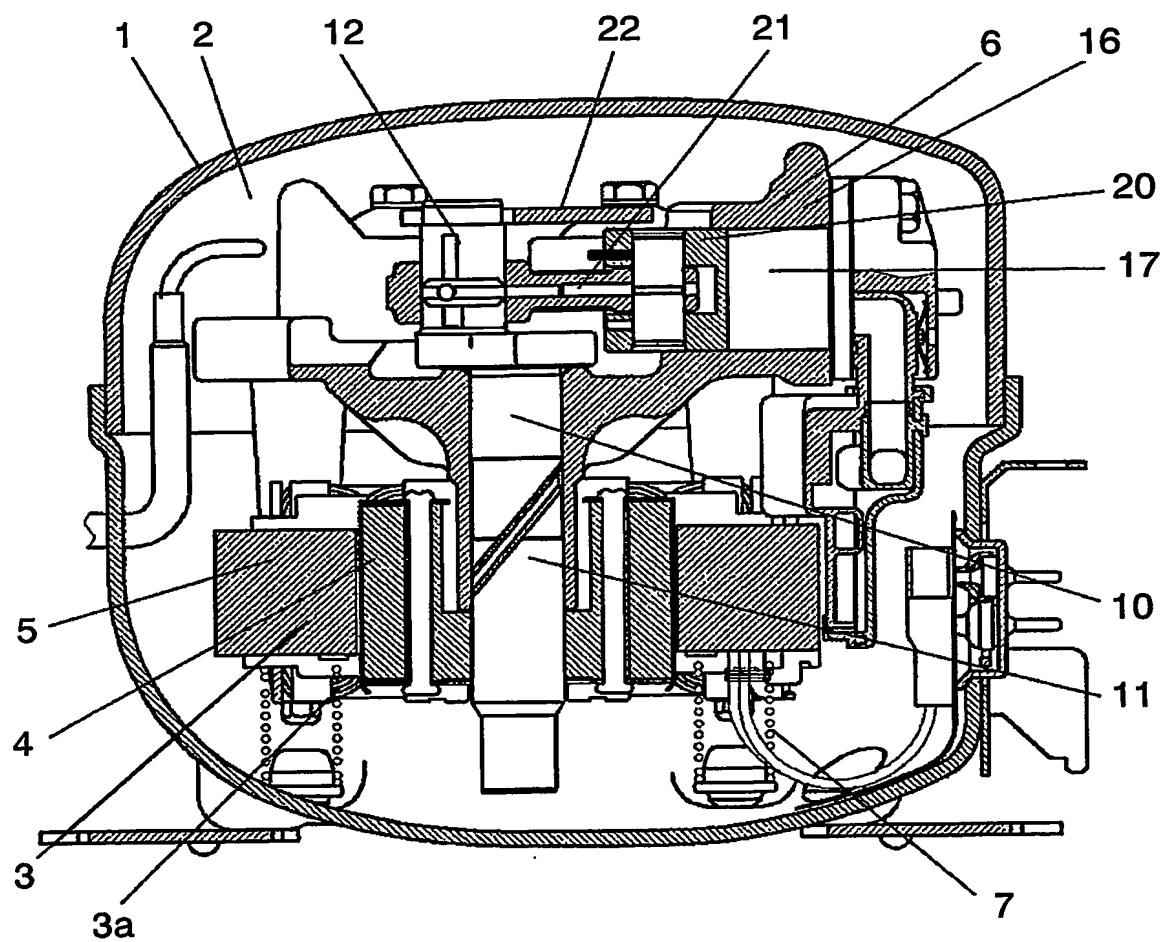

5/6

FIG. 6

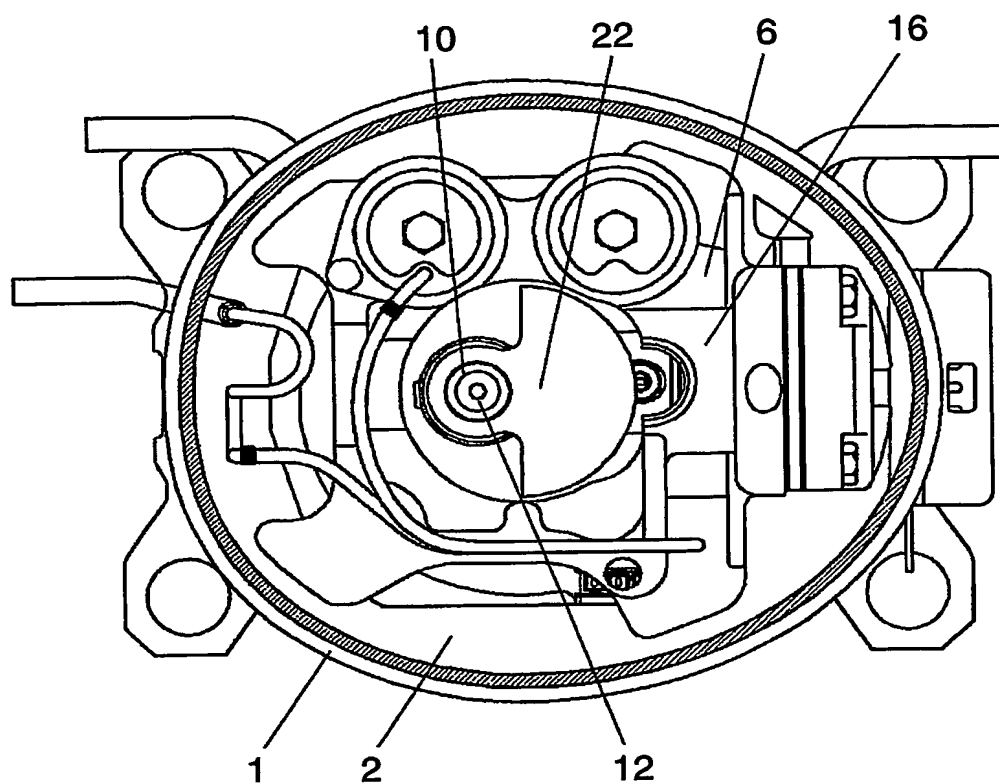

6/6

## Reference numerals in the drawings

- 101 Closed container
- 102 Refrigerant
- 105 Electric motor element
- 106 Compression element
- 110 Shaft
- 111 Main shaft body
- 111a Axial center of main shaft body
- 112 Eccentric shaft body
- 112a Axial center of eccentric shaft body
- 113 Subsidiary shaft body
- 116 Cylinder block
- 117 Compression chamber
- 119 Subsidiary bearing
- 120 Piston
- 121 Coupling means
- 122 Balance weight
- 125 Coupling part
- S Eccentric amount of shaft
- L Pitch length of coupling means
- C Skirt length of piston
- $\alpha$  Distance between outer circumference of balance weight and piston

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F04B39/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 406 590 A (TECUMSEH PRODUCTS COMPANY) 27 September 1983 (1983-09-27)	1, 3, 4, 7
Y	column 12, line 14 - line 22 claim 8 figures 1, 2, 8-11	5
Y	WO 02/42644 A (MATSUSHITA REFRIGERATION CO.) 30 May 2002 (2002-05-30) page 21, line 12 - page 22, line 8 figure 2	5
A	GB 2 315 300 A (NECCHI COMPRESSORI S.P.A.) 28 January 1998 (1998-01-28) page 3, line 24 - page 4, line 2 figures 1, 2	1
	----- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

1 October 2004

Date of mailing of the international search report

11/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Gnächterl, F

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP2004/008820

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 189 255 A (DANFOSS A/S) 15 June 1965 (1965-06-15) column 2, line 58 - column 3, line 5 figures 1,3 -----	1
A	US 2 343 211 A (KNAUS WILLIAM L ET AL) 29 February 1944 (1944-02-29) page 1, column 2, line 11 - line 45 figure 1 -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP2004/008820

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4406590	A	27-09-1983	AR 229352 A1	29-07-1983
			AR 230699 A1	31-05-1984
			AU 528690 B2	12-05-1983
			AU 7005281 A	24-12-1981
			BR 8103673 A	02-03-1982
			CA 1169396 A1	19-06-1984
			CA 1170232 A2	03-07-1984
			DE 3118678 A1	04-02-1982
			DE 3152453 A1	16-09-1982
			DE 3152454 A1	26-08-1982
			DE 3152455 A1	09-09-1982
			DK 242981 A	12-12-1981
			ES 8203494 A1	01-07-1982
			FR 2484557 A1	18-12-1981
			FR 2492472 A1	23-04-1982
			GB 2079860 A , B	27-01-1982
			GB 2091353 A , B	28-07-1982
			GB 2091354 A , B	28-07-1982
			IL 62523 A	30-08-1985
			IL 69137 A	30-08-1985
			IN 154939 A1	22-12-1984
			IN 159642 A1	30-05-1987
			IN 160497 A1	18-07-1987
			IT 1205246 B	15-03-1989
			JP 1500670 C	28-06-1989
			JP 57032088 A	20-02-1982
			JP 63043588 B	31-08-1988
			KR 8500054 B1	14-02-1985
			MX 151548 A	13-12-1984
			PH 17561 A	01-10-1984
			SU 1309921 A3	07-05-1987
			TR 21984 A	23-12-1985
			US 4406593 A	27-09-1983
			US 4559686 A	24-12-1985
WO 0242644	A	30-05-2002	JP 2002161855 A	07-06-2002
			AU 2409502 A	03-06-2002
			BR 0115644 A	06-07-2004
			EP 1338795 A1	27-08-2003
			WO 0242644 A1	30-05-2002
GB 2315300	A	28-01-1998	FR 2737260 A3	31-01-1997
			IT PV950005 U1	27-01-1997
			ES 1035793 U1	01-06-1997
US 3189255	A	15-06-1965	NONE	
US 2343211	A	29-02-1944	NONE	